

User Guide

Why the torque may get low after using a certain time?

How to judge?



Warning

The torque adapter is functional by the radial direction friction. It is different from the marketed product nowadays. When an object slips or is going to slip with another object, on the two contact faces will create a relative action. This relative action is called the static friction. It creates the abrasion after using a certain time. Thus, the preset torque adapter may get low due to this abrasion.


- $\pm 10\%$ allowance for torque adapter is acceptable.
- Please check it on torque analyzer or measurement.

Tightened screws with unknown torque



Do not use Sloky torque screwdriver to loosen tightened screws with unknown torque.

The tips of using different handle

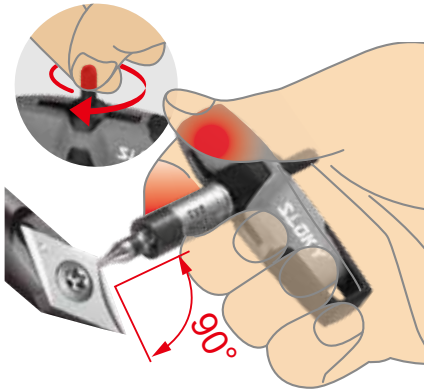

Large support areas for thumb and index finger on the ergonomically shaped handles.

The transmission of high torque is thus quite simple. Cylindrical handle shaft for quick turning of screws.



Please be mind that bit and screw head must be angled 90 degree.

The Slim Fit handle has been designed to fit snugly in your hand, making blisters and calluses a thing of the past, even after intensive use.

The handle hard zones allows the hand to easily glide during hand repositioning.

The soft zones ensures full force transfer through the grip.

The T Flying handle is needed whenever particularly high torque for loosening or tightening jobs needs to be applied.


The power is transferred positively, there is no frictional loss between the hand and the handle.

Interchangeable system

Handles



Adapters

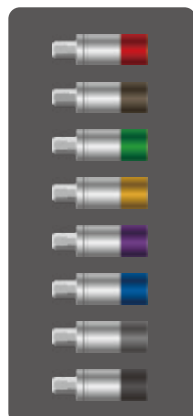

Bits - 25 / 50 / 75mm

