

(Torque Accuracy: $\pm 10\%$)

- 1.** Before use, confirm tool is at the "0" setting.




- 2.** Assemble the handle, adapter and bit.




- !** Failure to follow these instructions may affect accuracy and damage the tool.

- 3.** Turn the handle clockwise and visually align the required torque with the datum line.

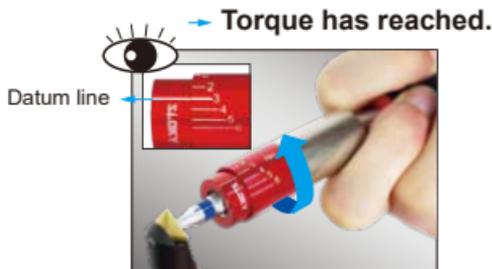

- 4.** Release the adapter, it will back to "0" position automatically.



! ATTENTION

The torque adapter is factory calibrated and no need adjustment before use.



NO "Click" sound when rotating.



NOT for loosening or turning counter-clockwise.




NOT Exceed the max. torque.



NOT for power tool. Manual operation only


Specification

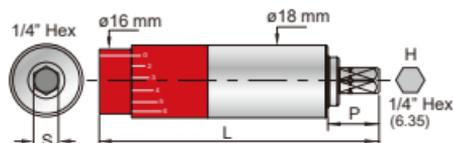

5 in 1 Multi Torque Adapter

Parts No.	Nm	KgfcM	In-lb	Driving S (mm)	Ød (mm)	L (mm)	P (mm)	Connecting H (mm)	Q'TY	N.W.
0-TPK-5IN1-6.0	2.0	20.4	17.7	DIN 3126 1/4" Hex	18	68.8	10	DIN 3126 1/4" Hex	1 pc	105g
	3.0	30.6	26.6							
	4.0	40.8	35.4							
	5.0	51.0	44.3							
	6.0	61.1	53.1							
Parts No.	Nm	KgfcM	In-lb	Driving S (mm)	Ød (mm)	L (mm)	P (mm)	Connecting H (mm)	Q'TY	N.W.
0-TPK-7IN1-10.0	2.0	20.4	17.7	DIN 3126 1/4" Hex	18	68.8	10	DIN 3126 1/4" Hex	1 pc	105g
	3.0	30.6	26.6							
	4.0	40.8	35.4							
	5.0	51.0	44.3							
	6.0	61.1	53.1							
	8.0	81.5	70.8							
10.0	101.9	88.5								

7 in 1 Multi Torque Adapter

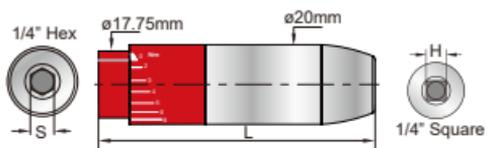

Parts No.	Nm	KgfcM	In-lb	Driving S (mm)	Ød (mm)	L (mm)	P (mm)	Connecting H (mm)	Q'TY	N.W.
0-TPK-7IN1-ETB-10.0	2.0	20.4	17.7	DIN 3126 1/4" Hex	20	69	--	DIN 3120 1/4" Square	1 pc	118g
	3.0	30.6	26.6							
	4.0	40.8	35.4							
	5.0	51.0	44.3							
	6.0	61.1	53.1							
	8.0	81.5	70.8							
10.0	101.9	88.5								

5in1 Multi Torque Adapter Kit

Parts No.	0-TPK-5IN1-H03
N.W.	220g




SLOKY®

Interchangeable system



EX: 3 Handles x 12 Torque adapters x TX/IP/HEX 25/50/75mm bits = 324 combos !!

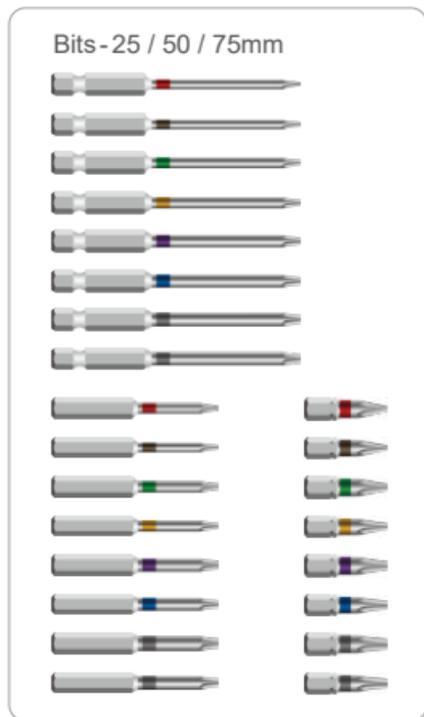

Simple operation All adapters with magnet, the bits can be inserted and automatically locked into the adapters.

SLOKY®

Handle

Slim-Fit Handle
0.1~2.0Nm



Universal Handle
0.6~5.7Nm



T Flying Handle
3.0~10.0Nm



Mini Handle
0.1~0.7Nm



Hex 3Way Driver
0.6~5.5Nm



QuickE Electric Handle
0.6~6.0Nm





Fixed Torque Adapter

General Use Torque Adapter



A & Left hand Series
0.6 ~ 5.7Nm

Small Torque Adapter



STA Series
0.1 ~ 0.7Nm

Mini Torque Adapter



MTA Series
10 ~ 70cNm

Extend Torque Adapter



ESTA / ETA / ETB / ETC Series
6 ~ 18Nm

Power Tool Torque Adapter



PTEQ Series | 2~5Nm
Quick change

Custom Torque Adapter



~ 22Nm

SMART TORQUE EVERYWHERE POSSIBLE